



LNB NORSAT
5500F
\$14,500 MXN

ESPECIFICACIONES

FEATURES

Ideal for DBV (Digital Broadcast Video), VSAT Broadband, Military Satcom, Point-of-Sale, and Oil and Gas applications

- LO Stability +/- 50 kHz to +/-100 kHz
- 15 K noise temperature
- 580 grams / 20.5 ounces

FREQUENCY BANDS AVAILABLE

Input frequency (GHz)	3.4 – 4.2 GHz
L.O. frequency (GHz)	5.15 GHz
Output frequency (MHz)	950 – 1750 MHz


TYPICAL SPECIFICATIONS	
L.O. stability	±50 kHz - ±100 kHz depending on model number
Noise temperature	15 K typ., 30 K max
Phase noise	-65 dBc/Hz at 1 kHz offset -80 dBc/Hz at 10 kHz offset -95 dBc/Hz at 100 kHz offset
Input VSWR & Output VSWR	2.3 : 1
Conversion gain	62 dB typical 55 dB min 70 dB max
Output P1dB	10 dBm
Power requirements	12 - 24V DC supplied through center conductor of IF cable
Current drain	250 mA
Input Waveguide	CPR 229G
Dimensions	190 (L) x 115 (W) x 78 (H) mm (7.1 x 4.0 x 2.8 in)
Weight	580 g / 20.5 oz
Temperature Range	-40°C to +60°C

☎ 744 445 67 39 | 744 445 73 59

www.antenas.mx

 **Antenas de México**
45 AÑOS A TU SERVICIO

MECHANICAL DIAGRAM

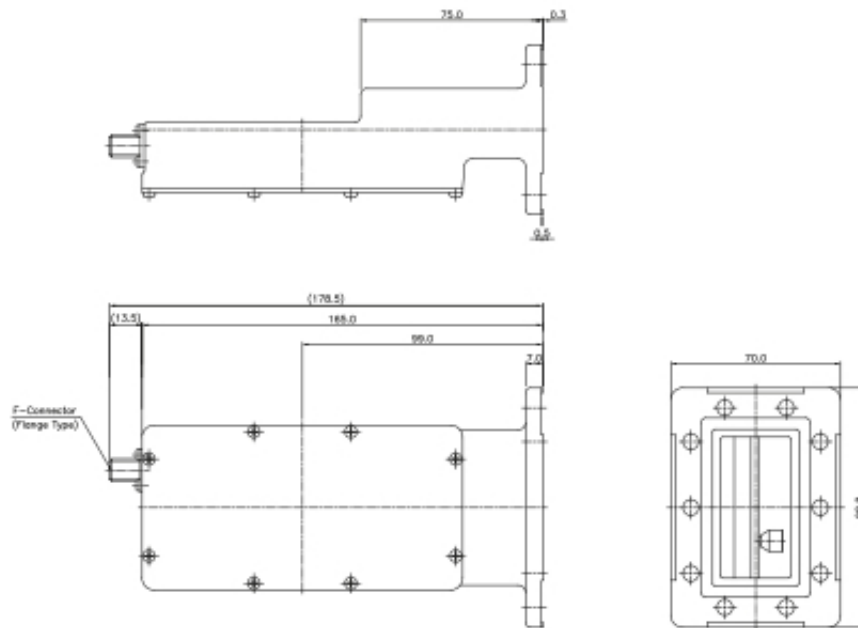

HOW TO ORDER

5500F

CONNECTOR

F - 75 Ohm
N - 50 Ohm

L.O. STABILITY

5 - ± 50 kHz
7 - ± 75 kHz
1 - ± 100 kHz

LNB SERIES #

☎ 744 445 67 39 | 744 445 73 59

www.antenas.mx

 **Antenas de México**
45 AÑOS A TU SERVICIO