

CARACTERÍSTICAS

Features & Benefits


- Zinc Die-cast Housing with Corrosion Protection
- Solde Bac
- -120 dB RF

Specifications

	SDS-12	SDS-16
Loss (dB)		
5 - 40 MHz:	11	14
40 - 400 MHz:	11	14
400 - 500 MHz:	11.5	14.5
500 - 600 MHz:	12	15.5
600 - 1000 MHz:	13	15.5
Isolation (dB)		
5 - 40 MHz:	28	23
40 - 400 MHz:	32	28
400 - 500 MHz:	30	25
500 - 600 MHz:	28	22
600 - 1000 MHz:	25	22
Return Loss Input (dB)		
5 - 40 MHz:	18	18
40 - 400 MHz:	18	18
400 - 500 MHz:	18	18
500 - 600 MHz:	18	18
600 - 1000 MHz:	18	18
Return Loss Output (dB)		
5 - 40 MHz:	18	18
40 - 400 MHz:	20	22
400 - 500 MHz:	20	22
500 - 600 MHz:	20	20
600 - 1000 MHz:	18	18

Ordering Information

Model	Stock No.	Description
SDS-12	1938	Splitter, 12 Way Solder Back, 5-1000 MHz
SDS-16	1939	Splitter, 16 Way Solder Back, 5-1000 MHz

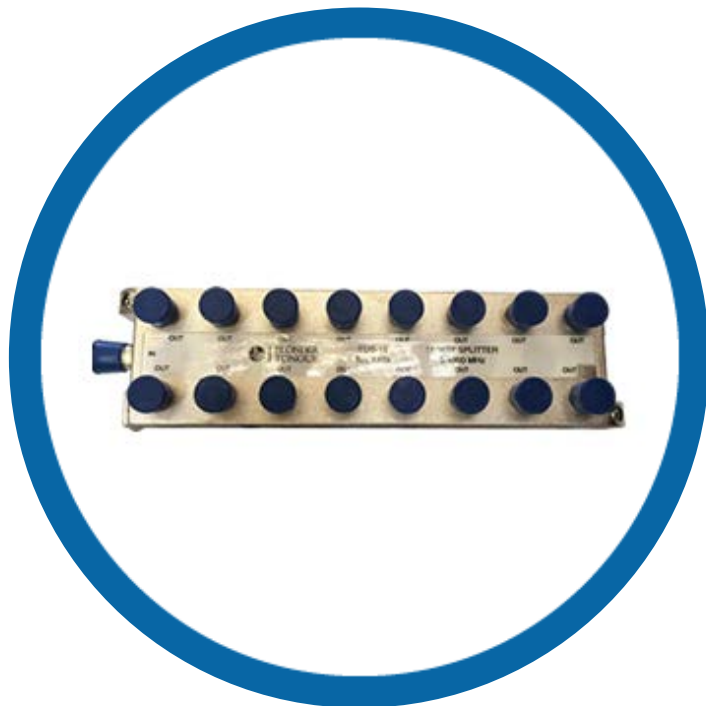

SDS-16 BLONDER
TONGUE
\$3,800 MXN

☎ 744 445 67 39 | 744 445 73 59

www.antenas.mx

 **Antenas de México**
45 AÑOS A TU SERVICIO